

MEGA[®] FUSE RATED 32V

RoHS



Also available:
MEGA Clear Top Housing Fuse

Clear Housing Material:
Polyethersulfone (top)
PPA (33%/35% GF) (bottom)

Specifications

Interrupting Rating:	2000A @ 32 VDC
Voltage Rating:	32 VDC
Operating Temperature Range:	-40°C to + 125°C
Housing Material:	PPA (33%/35% GF)
Terminals:	Copper (Silver plated copper available) M6 or M8 bolts available
Mounting Torque:	8-14 Nm M6 12-18 Nm M8
Ref. To:	ISO 8820-5

Ordering Information

Part Number	Package Size	Plating	Bolt Size	Rating
0298xxx.ZXH	500	none	M8	300 - 500
0298xxx.ZXEH	500	none	M8	80 - 250
0298xxx.ZXB	500	Ag	M8	40 - 250
0298xxx.ZXA	500	none	M6	80 - 500


MEGA Clear Top Housing Material Fuse

0298xxx.UXT	500	none	M8	40 - 250
-------------	-----	------	----	----------

Description

The MEGA[®] Fuse is designed for high current circuit protection up to 500A with "Diffusion Pill Technology." The MEGA[®] Fuse also provides time delay characteristics. Designed and patented by Littelfuse, the MEGA[®] Fuse is ideal for battery and alternator protection application and other heavy gauge cables requiring ultra-high current protection.

Temperature Rerating Curve

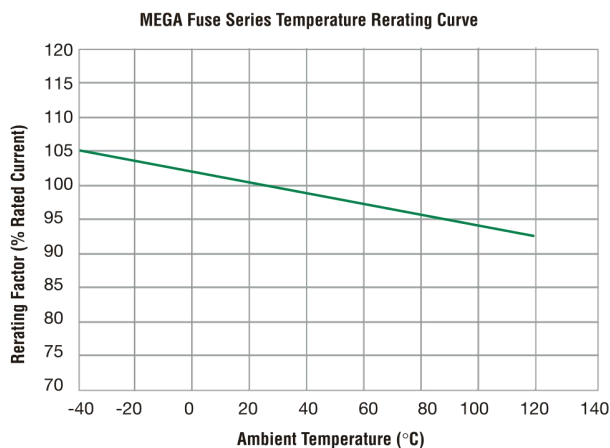

Time-Current Characteristics


% of Rating	Opening Time Min / Max (s)	
	40-250	300-500
75	- / -	14,400 s / -
100	14,400 s / -	- / -
135	120 s / 1800 s	- / -
200	1 s / 15 s	1 s / 15 s
350	0.300 s / 5 s	0.500 s / 5 s
600	0.100 s / 1 s	0.100 s / 1 s

MEGA[®] FUSE RATED 32V


RoHS

Dimensions

Dimensions in mm

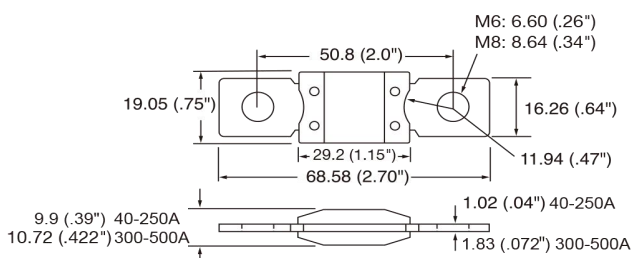

Time-Current Characteristic Curves

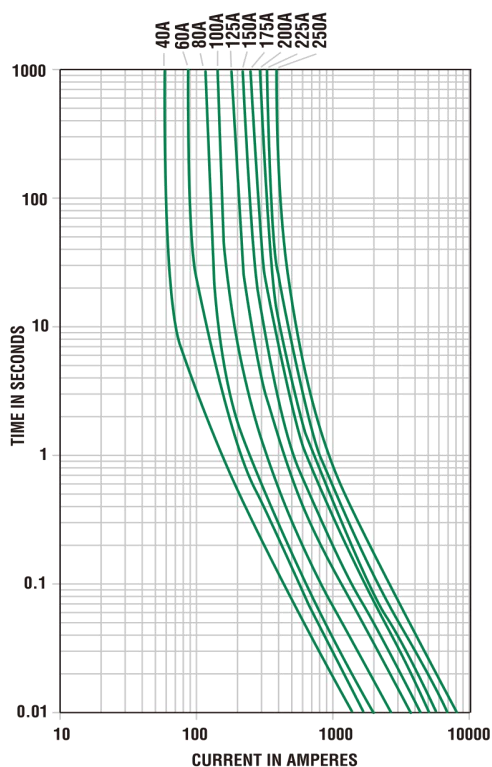

Ratings

Part Number	Current Rating	Font Color*	Typ. Voltage Drop	Cold Resistance	I ² t
0298040._1	40 A	—	132 mV	2.313 mΩ	8700 A ² s
0298060._1	60 A	—	119 mV	1.504 mΩ	21000 A ² s
0298080._	80 A	■	87 mV	0.720 mΩ	21500 A ² s
0298100._	100 A	■	87 mV	0.562 mΩ	31100 A ² s
0298125._	125 A	■	80 mV	0.423 mΩ	57800 A ² s
0298150._	150 A	■	92 mV	0.352 mΩ	100000 A ² s
0298175._	175 A	□	86 mV	0.294 mΩ	168000 A ² s
0298200._	200 A	■	83 mV	0.257 mΩ	204000 A ² s
0298225._	225 A	■	82 mV	0.222 mΩ	257000 A ² s
0298250._	250 A	■	82 mV	0.201 mΩ	389000 A ² s
0298300._2	300 A	■	74 mV**	0.167 mΩ	315000 A ² s
0298350._2	350 A	■	68 mV**	0.138 mΩ	500000 A ² s
0298400._2	400 A	■	64 mV**	0.126 mΩ	610000 A ² s
0298450._2	450 A	■	60 mV**	0.112 mΩ	1050000 A ² s
0298500._2	500 A	■	58 mV**	0.092 mΩ	2050000 A ² s

Note 1: Not mentioned in ISO standards Note 2: Short Circuit Protector only

* 0298xxx.ZXB has white font color on all ratings.

** Voltage Drop measurements for short circuit protectors taken at 75% of rated current.