



使用于
XQ-3-4

7LE'00E'Z00

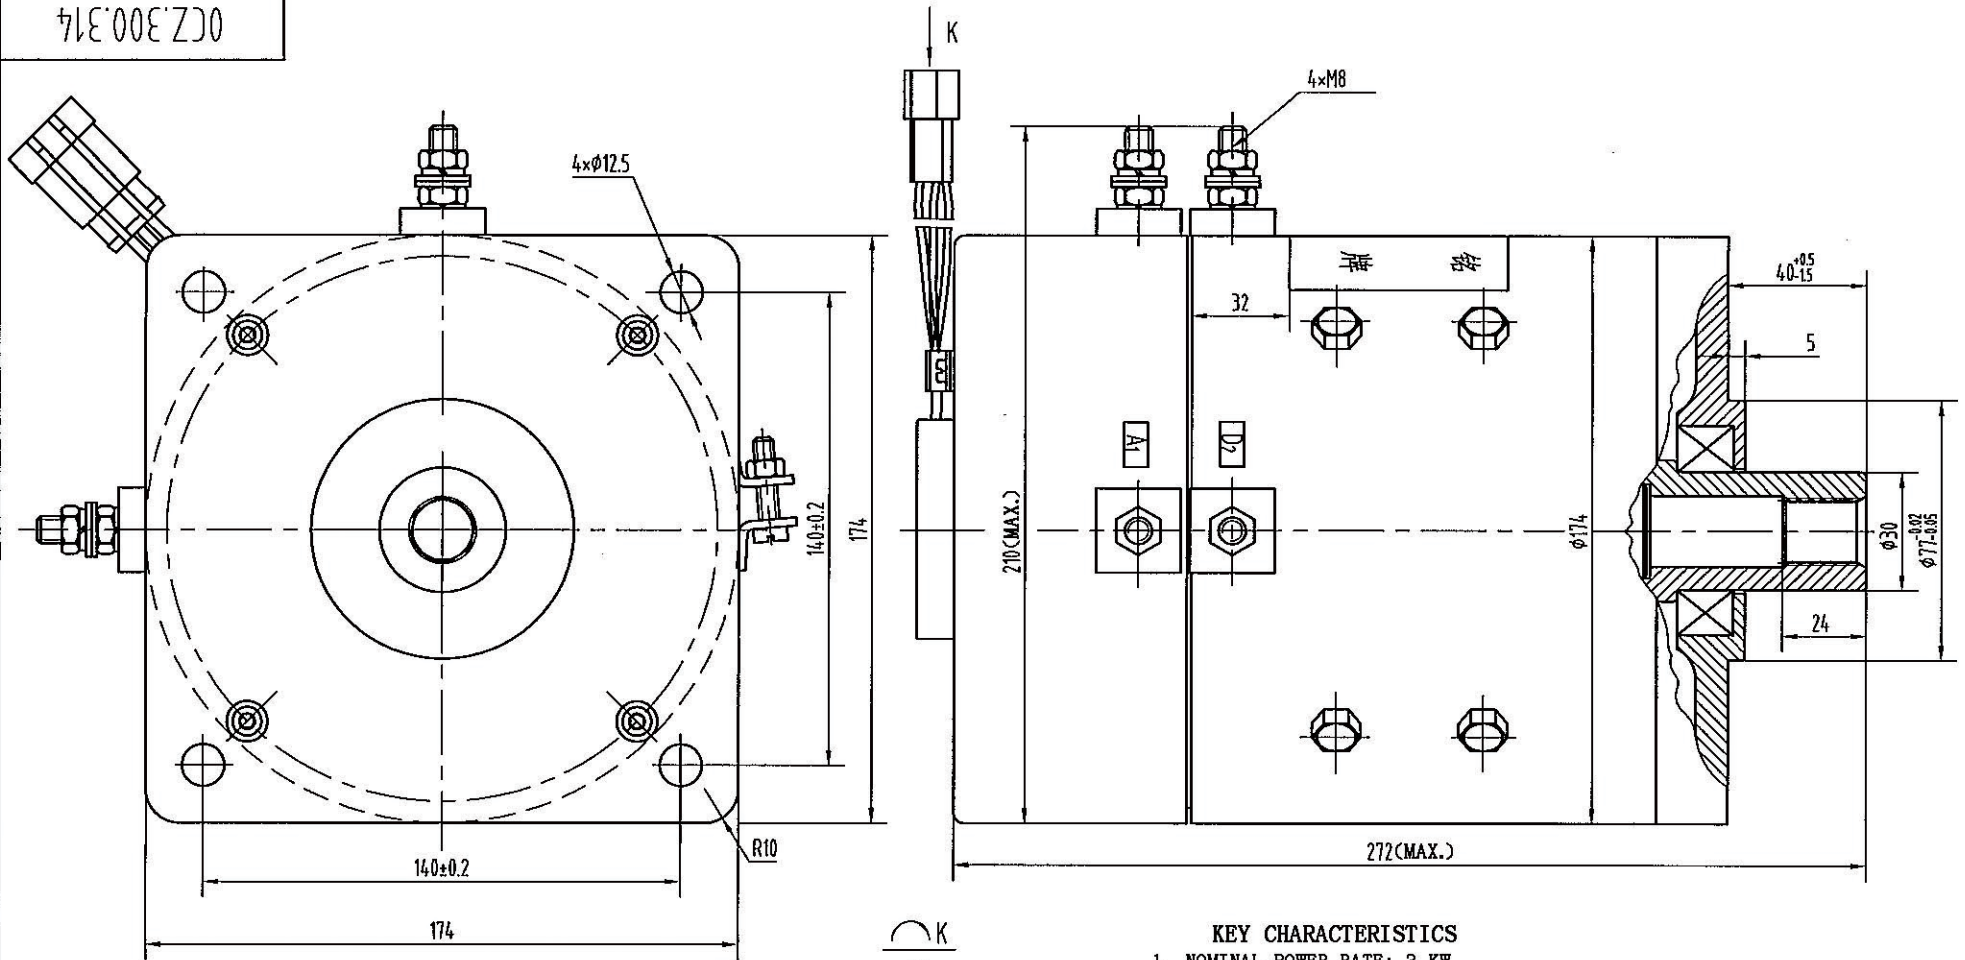

KEY CHARACTERISTICS

1. NOMINAL POWER RATE: 3 KW
2. NOMINAL VOLTAGE: 48 V
3. 1 HOUR CURRENT: 79A
4. RATED SPEED: 2800 RPM
5. EXITATION MODE: SERIES
6. INSULATION: CLASS H
7. PACKAGE ENVIRONMENTAL RATING: IP44

TRIGONOMETRIC SPLINE PARAMETERS

TEETH NUMBER	Z	18	MODIFICATION COEFFICIENT	X	0.8
MODULE	M	1	ROD DISTANCE	M	16.067 ^{+0.071}
PRESSURE ANGLE	α	20°	ROD DIAMETER	d	2.0
PITCH DIAMETER	d	18	Centering Method		TOOTH PROFILE
LARGE DIAMETER	da	20 ^{+0.020} _{-0.041}	BASE DIAMETER		16.914
SMALL DIAMETER	df	18 ^{+0.010}			

设计
校对
审核
工艺
标准
批准

					noco		
					DC SERIES MOTOR		
标记	处数	更改文件号	签名	年月日	阶段标记	重量	比例
设计			标准化		S A		1:15
校对							
审核					共张	第张	0
工艺			批准				
					0CZ.300.314		
					XQ-3-4		