


Characteristics

- | | |
|------------------------------|-----------------------------|
| 1. power rate: 3.4/4/5 kW | 6. exciting: series |
| 2. rated voltage: 48/48/60 V | 7. Insulation: class H |
| 3. rated current: 88/96/95 A | 8. Ingress Protection: IP20 |
| 4. speed: 3100/2900/3500 rpm | |
| 5. duty: 60 min | |

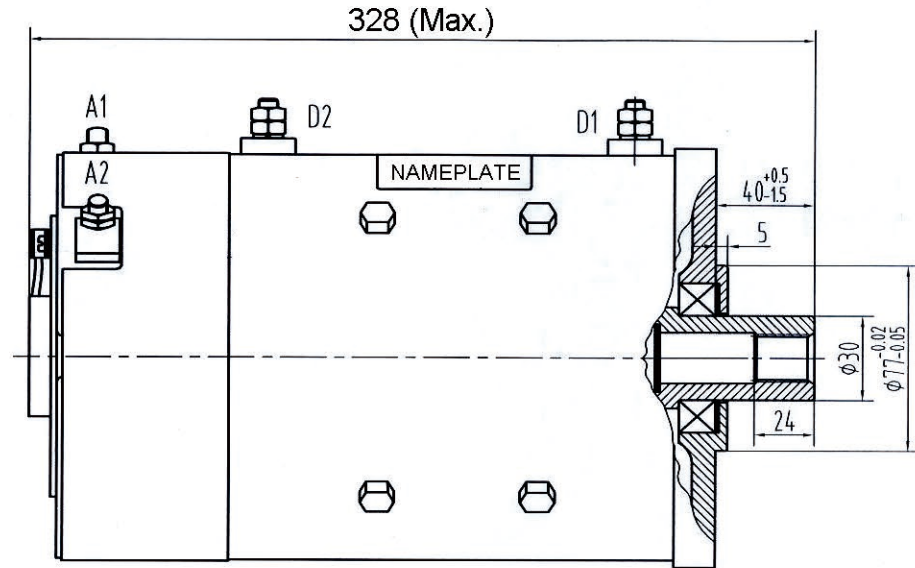

Triangle Spline

Teeth (Z)	18
Spline modulus (m)	1
Pressure Angle (α)	20°
Index circle diameter (d)	18
Outside diameter (da)	20 ^{-0.020} _{-0.041}
Inside Diameter (df)	18 ^{+0.018} ₀
Deflection Coefficient (X)	0.8
Pitch (M)	16.067 ^{+0.071}
Pinion diameter (d)	2.0
Centering Mode	Tooth Side
Base Circle Diameter (Db)	16.914

					NOCO SHOP		
					www.noco-evco.com		
标记	数量	更改文件号	签名	年月日			
设计			标准化		阶段标记	重量	比例
校对					S		1:1.5
审核					共 张 第 张 0		
工艺			批准		XQ-3.8-4		